



**STANDBY  
GENERATORS**

# 12kW<sup>1</sup> STANDBY GENERATOR



## BRIGGS & STRATTON® THE SMART CHOICE

For the discerning homeowner that is looking for the smartest, most reliable permanent backup power solution.



### Space Saving Design

- 50% smaller than our previous 12kW generator

### 60% Quieter<sup>2</sup>

- Re-engineered to be 60% quieter than our previous 12kW

### Designed for Easy Installation & Maintenance

- Easy to move into installation location with two-wheel dolly
- Approved for installation as close as 18" to a building<sup>3</sup>
- Removable roof and side panels provide better service access to the engine and alternator

### Symphony® II Power Management System

- Customizable to your home's needs
- Automatically balances the power of your home's electrical load including high wattage items like air conditioning units and electric ovens
- Offers whole house power with a more affordable home generator

### Commercial-Grade Briggs & Stratton Vanguard™ Engine

- Powerful V-Twin OHV engine
- Easy conversion between natural gas (NG) and liquid propane vapor (LP) during installation

### Quality Clean Power

- Ensures your electronics are safely powered

### Corrosion Resistant Enclosure & Base

- Made with automotive grade galvanized steel to resist rust
- Powder-coated paint for years of protection against chips and abrasions



## GENERATOR SET RATINGS

MODEL	VOLTAGE	PHASE	HZ	BREAKER	LIQUID PROPANE		NATURAL GAS		LIMITED WARRANTY <sup>4</sup>
					LP kW	LP AMPS	NG kW	NG AMPS	PARTS, LABOR, TRAVEL
Briggs & Stratton 040517	120/240	1	60	60	12	50	10.8	41.7	5 Year

<sup>1</sup> This generator is rated in accordance with UL (Underwriters Laboratories) 2200 (stationary engine generator assemblies) and CSA (Canadian Standards Association) standard C22.2 No. 100-04 (motors and generators).

<sup>2</sup> Based on no-load sound power.

<sup>3</sup> The installation manual contains specific instructions related to generator placement in addition to NFPA 37, including the requirement that carbon monoxide detectors be installed and maintained in your home.

<sup>4</sup> Warranty details available at [www.briggsandstratton.com](http://www.briggsandstratton.com)



**Nobles Cooperative  
Electric**

Your Touchstone Energy® Cooperative





**ENGINE SPECIFICATIONS**

ENGINE		LUBRICATION	
Engine Model	Briggs & Stratton Vanguard™	Oil Capacity (oz)	48
Engine Model Type Trim Number	389575-0002E1	Lubrication System	Full Pressure
Engine Speed (RPM)	3600	Recommended Oil	5W30 Full Synthetic
Engine Fuel	Liquid Propane (LP) or Natural Gas (NG)	Low Oil Pressure Sensor	Yes
Engine Cylinder Configuration	OHV	ALTERNATOR SPECS	
Number of Cylinders	2	Manufacturer	Mecc Alte
Displacement (cc)	38 / 627	Type	Self-Excited, Rotation Field
Bore & Stroke (in)	2.97 / 2.76	Voltage Regulator	Brushless
Compression Ratio	8.3:1	Insulation	Class H
Governor Type	Electronic	CONTROLLER FEATURES	
Frequency Regulation	+/- 1 Hz	Hour Meter	Yes
Valves	OHV with Hardened Seats	LED Digital Display	Yes
Ignition System	Fixed timing Magnetron® Electric Ignition	Fault Code Display	Yes
Starter Motor Rating Voltage	12 Volt	Weekly Exerciser	Yes
Battery	12 Volt		

**OPERATIONS**

FUEL CONSUMPTION <sup>1</sup>				SOUND RATING AT 7 METERS	
50% Load		100% Load		69 dBA	
Liquid Propane	62.1 ft <sup>3</sup> / hr	1.7 gal / hr	83.8 ft <sup>3</sup> / hr	2.3 gal / hr	Lowest measurement of 12 microphones around generator. Sound level measurement at other locations around generator may be different depending upon installation configuration.
Natural Gas	117 ft <sup>3</sup> / hr	—	172 ft <sup>3</sup> / hr	—	

<sup>1</sup> Fuel consumption rates are estimated based on normal operating conditions. Generator operation may be greatly affected by elevation and the cycling operation of multiple electrical appliances – fuel flow rates may vary depending on these factors.






ADDITIONAL INFORMATION

OTHER FEATURES	
Enclosure Material	Galvanneal Steel with Corrosion Resistant Paint
Overcrank Protection	Yes
Engine Warm Up (sec)	20 or 50 Automatic Transfer Switch Controlled
Engine Cool Down (min)	1
Response Time (sec)	26 or 56 Automatic Transfer Switch Controlled
Monitoring Options	Basic Wireless Monitor InfoHub™ Monitor
Continuous Battery Charging	Yes

CERTIFICATION	
CARB Compliant	Yes
NFPA Approved	Yes
cUL Listed to CSA 22.2 NO 100-04	Yes
NEMA Compliant	Yes
EPA Certified Fuel System	Yes

WEIGHT AND DIMENSIONS	
Assembled Weight (lbs)	318
Overall Dimensions (in)	28 x 24.4 x 37.2
Packaged Weight (lbs)	345
Packaged Dimensions (in)	39 x 35.5 x 45

AVAILABLE ACCESSORIES	
Maintenance Kit	6035
Cold Weather Kit	6348
Basic Wireless Monitor	6264
InfoHub	6260
Remote Status Monitor	6144

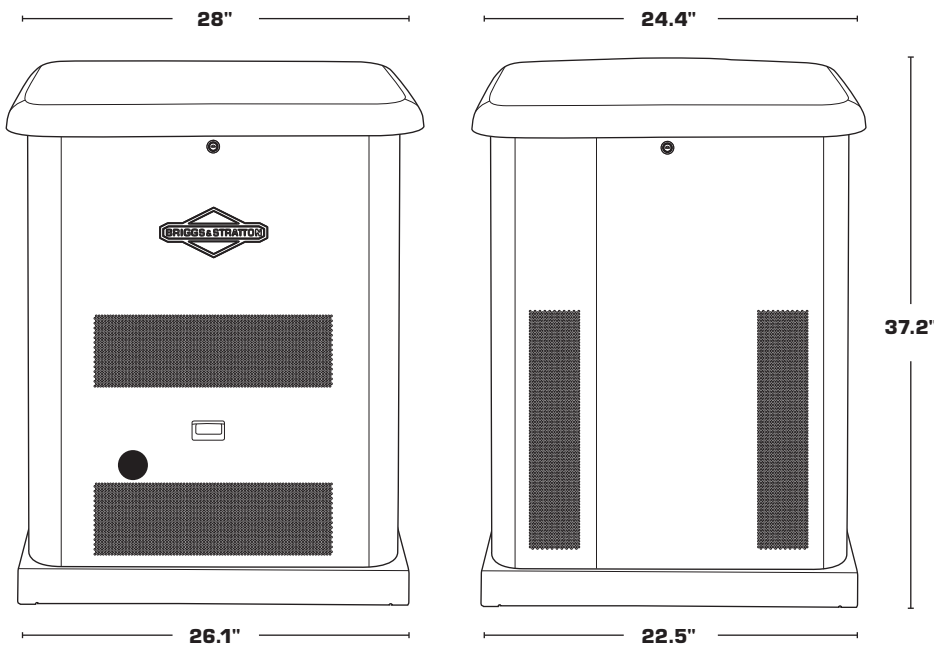



FUEL PIPE SIZE RECOMMENDATION CHART (CAPACITY IN THOUSANDS OF BTU/HOUR)

Table with 7 columns: Natural Gas / Inlet Pressure less than 2 PSI / Pressure Drop 1/2" Water Column / Specific Gravity 0.60. Rows include pipe capacities for 1/2", 3/4", 1", 1-1/4", 1-1/2", and 2" pipes at lengths of 20', 40', 60', 80', and 100'.

Table with 7 columns: Liquid Propane / Inlet Pressure 11" Water Column / Pressure Drop 1/2" Water Column / Specific Gravity 1.50. Rows include pipe capacities for 1/2", 3/4", 1", 1-1/4", 1-1/2", and 2" pipes at lengths of 20', 40', 60', 80', and 100'.

\*Total length of piping from outlet of regulator to appliance furthest away.

ADDITIONAL INFORMATION

TRANSFER SWITCH SPECIFICATIONS table with columns for circuit type (Prewired 16 Circuit, Standard 16 Circuit, Symphony II), amp rating (100 AMP, 150 AMP, 200 AMP), and model number (#071076, #071047, #071071, #071070, #071068). Also includes Voltage Rating (120/240), Number of Protected Circuits (16 or Whole House), UL Approved (Yes), and NEMA 3R Rated (Yes).

SUPPORT EVERY STEP OF THE WAY. NEED HELP? Just call 800-759-2744. Our technical support team is trained to answer questions on our generators, transfer switches and accessories. CALL TODAY FOR A FREE IN-HOME ESTIMATE! 800-743-4115

Disclaimer: Not for Prime Power or use where standby systems are legally required, for serious life safety or health hazards, or where lack of power hampers rescue of fire-fighting operations.

BRIGGS & STRATTON
POST OFFICE BOX 702
MILWAUKEE, WI 53201 USA
Copyright ©2016. All rights reserved. BS1007-I - 11/16

